

FA42T-6MB


Strategy II 4" "Motor Board" Assembly

1. Install Enclosure Per Instructions Provided. Extend Service Loop at Least 6" Beyond Bottom Lip of Enclosure
2. Terminate Service Loop to Red & Black Leads on Motorboard
3. Install Motorboard Into Enclosure with Screws Provided
4. Select Wattage Tap Via Front Selector Switch
5. Install Original FA Series Grille

FA42T-6MB

Frequency Response: 70Hz - 20kHz

Sensitivity: 88dB (1W/1M)

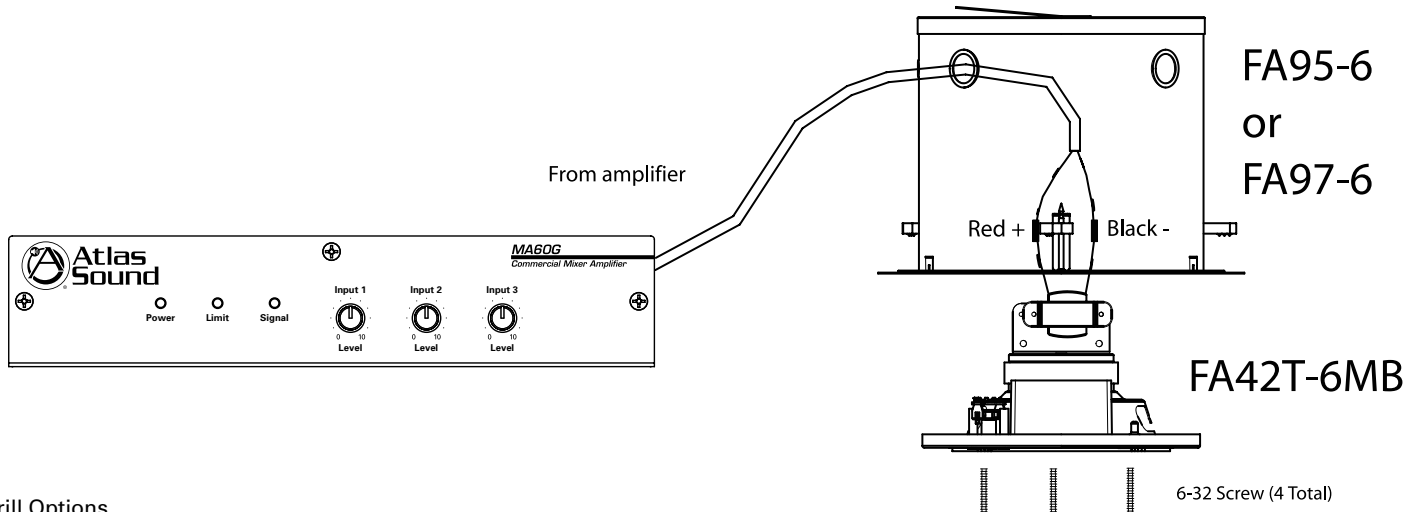

Grill Options

| | |
|---------|--------|
| FA51-6 | Round |
| FA170-6 | Round |
| FA720-6 | Round |
| FA730-6 | Square |