


SM15PS

15" Two-way Full Range Speaker System

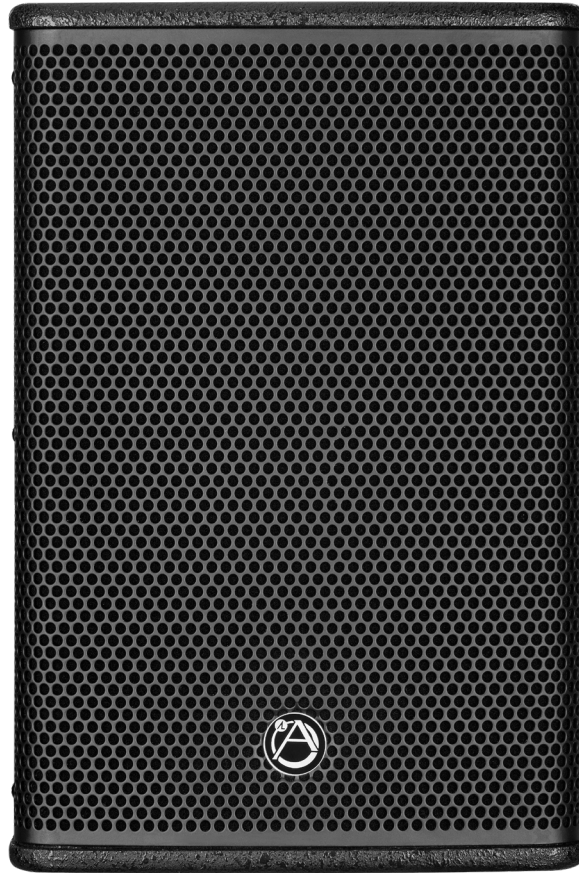

Features

- Two-way passive speaker system
- Rotatable horn
- Unique cabinet design
- Water-based paint for environmental purpose

Applications

Near-field portable or installed PA for clubs, theaters and broadcast etc;
Fill-in system in conjunction with large TurboPower sound systems;
House of worship.

General Description

The SM15PS is a versatile, two-way passive system, designed to provide exceptional sound reinforcement and stage monitoring from a very compact enclosure. It features a powerful 15" low frequency driver and a 1" exit HF horn loaded dome tweeter mounted on a constant directivity 80° x 50° horn. The HF horn can be rotated to allow the multi-angle enclosure to be used in either its vertical or horizontal orientation. Multiple internal rigging points for ground-support, truss and wall mounting. Pole mount socket, flush handle and Speakon NL4 connectors.

Specifications	
Frequency Response	50Hz-20kHz±3dB,-10dB@45Hz
Drivers	1 x 15" LF driver, 1 x 1.75" (44mm) exit HF compression driver
Rated Power (RMS)	450W
Peak Power	1800W
Sensitivity (1W/1m)	99dB
Maximum SPL	126dB (Continuous), 132dB (Peak)
Normal Impedance	8 ohms
Dispersion (-6dB)	90° (Horizontal), 70° (Vertical)
Crossover	1.8kHz Passive
Finish	Textured black paint
Protective Grille	Black perforated steel
Connectors	2 x Neutrik speakon NL4
Fittings	Top hat fitting
Dimensions (W X H x D)	429 x 676 x 435 mm
Weight	26Kg

©2022 Atlas Sound L.P. The Atlas "Circle-A", Soundolier, and Atlas Sound are trademarks of Atlas Sound L.P. IED is a Registered Trademark of Innovative Electronic Designs LLC. All rights reserved. All other Trademarks are property of their respective owners. No endorsement is implied. Due to continual product development, specifications are subject to change without notice. ATSO06883 RevA 7/22